





Flextech Engineering Inc.
www.flextechseals.com

Product Description

Flextech 250-N is used in low temperature applications. Due to its outstanding flexibility, it is good for fan inlets and outlets where there is severe vibration. Available in belts or molded to "u" shapes.

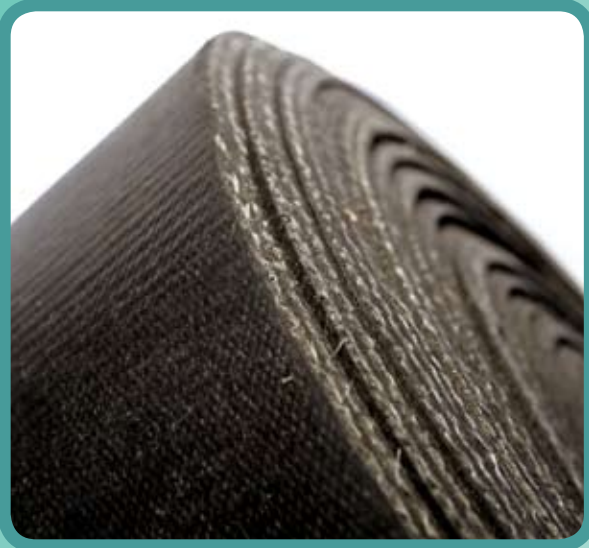

250-N 1/4" glass reinforced Neoprene

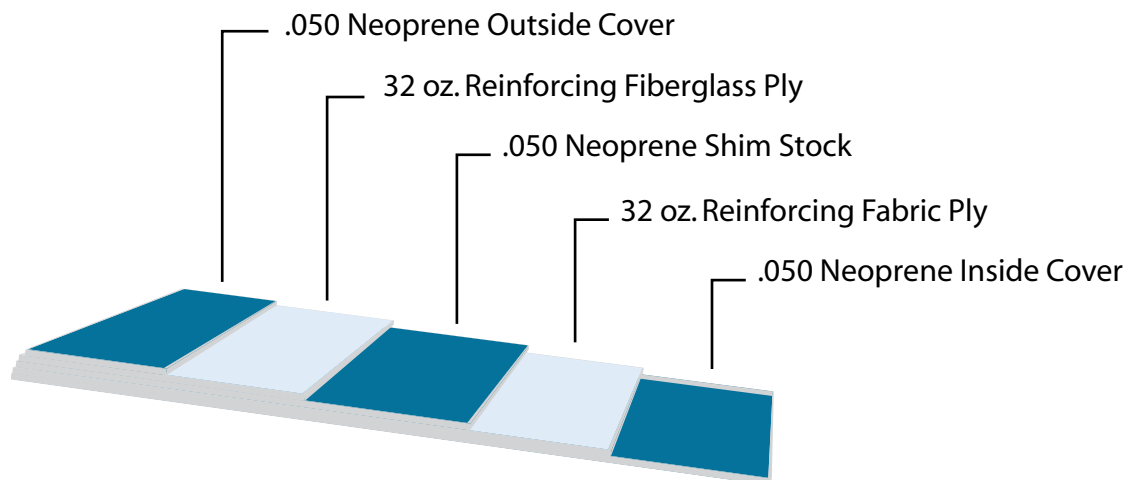

Elastomeric Compound:	Neoprene
Temperature:	-40 °F to 250 °F
Media:	Hot Air, Oil, Gas, Caustic
Abrasion Resistance:	Good
Durometer:	65
Tensile:	1800 PSI

Reinforcing Fabric:	32 oz. Fiberglass
Weave Style:	Plain
Warp Strength:	300 Lbs.
Fill Strength:	300 Lbs.
Weathering:	Excellent
Flexibility:	Excellent