





Flextech Engineering Inc.
www.flextechseals.com

Product Description

Flextech 400-V has excellent weathering characteristics, excellent chemical resistance, and due to its outstanding flexibility, its good for fan inlets and outlets where there is severe vibration. Available in belts or molded to "u" shapes.

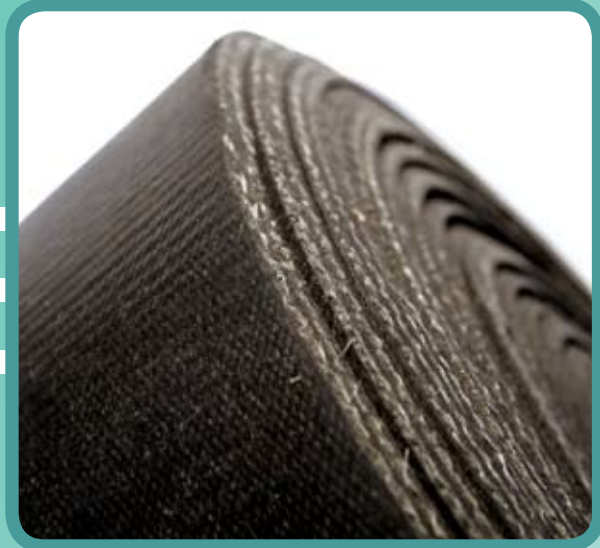

400-V
1/4" glass reinforced Fluoroelastomer

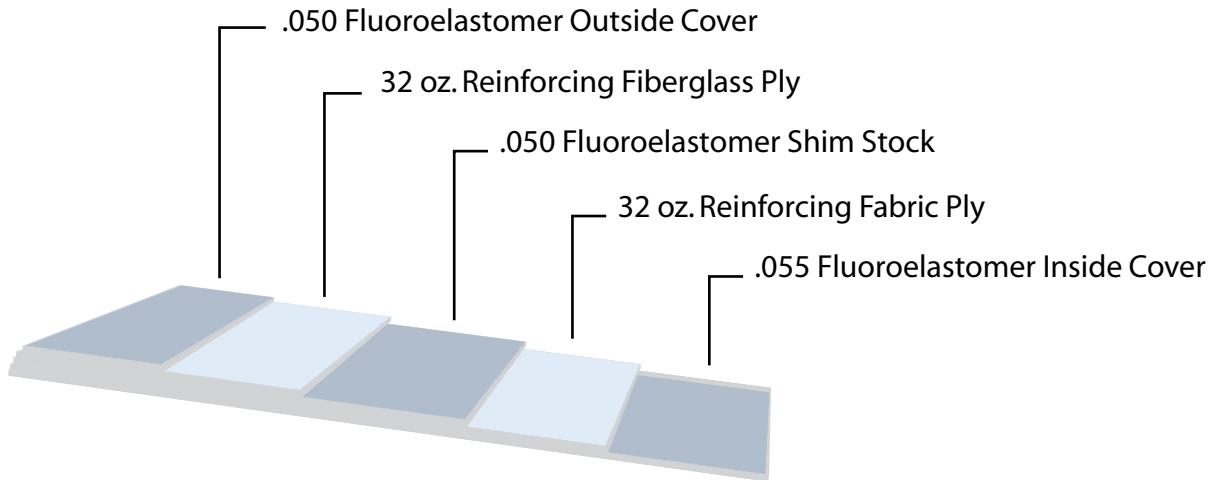

Elastomeric Compound:	Fluoroelastomer
Temperature:	-40 °F to 400 °F (600 °F Excursion)
Media:	Highly Acidic Flue Gases, Sulphur
Abrasion Resistance:	Good
Durometer:	65

Tensile:	1800 PSI
Reinforcing Fabric:	32 oz. Fiberglass
Weave Style:	Plain
Warp Strength:	300 Lbs.
Fill Strength:	300 Lbs.
Weathering:	Excellent
Flexibility:	Excellent