





Flextech Engineering Inc.
www.flextechseals.com

Product Description

Flextech 450-S is used in hot air applications, where there is no sulfur present. It has outstanding weathering characteristics and excellent flexibility. It can handle temperatures up to 450 °F.

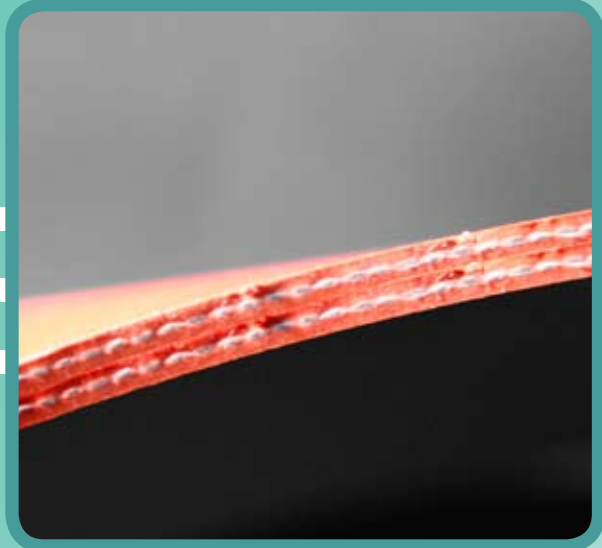

450-S 1/4" glass reinforced Silicone

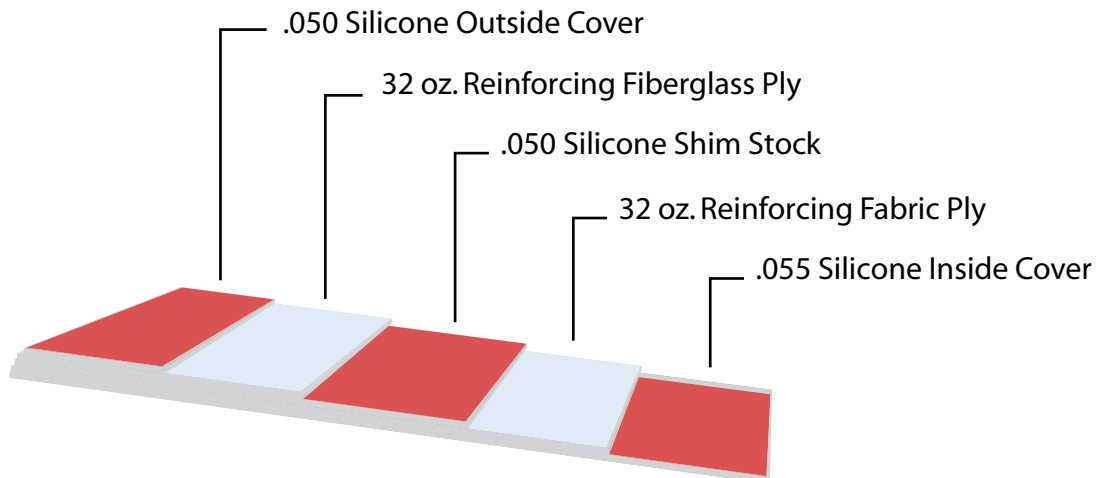

Elastomeric Compound:	Silicone
Temperature:	-60 °F to 450-500 °F
Media:	Hot Air
Abrasion Resistance:	Poor
Durometer:	50
Tensile:	1800 PSI

Reinforcing Fabric:	32 oz. Fiberglass
Weave Style:	Plain
Warp Strength:	300 Lbs.
Fill Strength:	300 Lbs.
Weathering:	Excellent
Flexibility:	Excellent