





**Flextech Engineering Inc.**  
[www.flextechseals.com](http://www.flextechseals.com)

**Product Description**

The Insultex 12/1406 is for applications up to 700 °F. It is comprised of a layer of Teflex which is bonded to a layer of woven fiberglass. This unique bonding provides a strong and resilient material, which can reach very high temperatures.

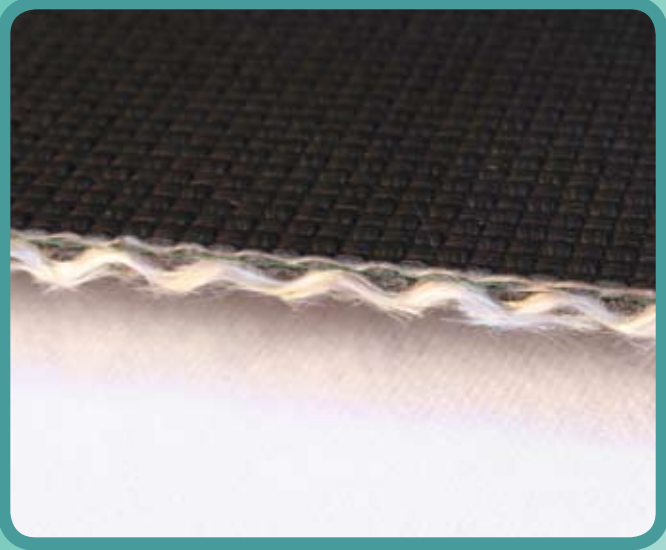

## Flextech Insultex 12/1406 Fluoroplastic and Fiberglass

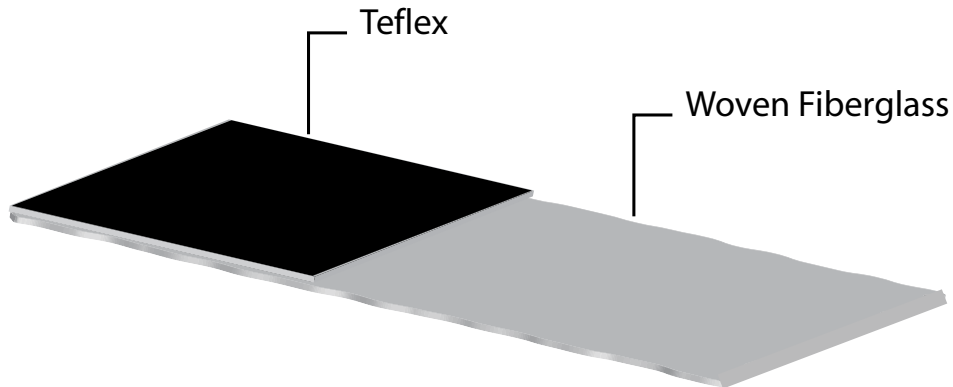

Chemical Resistance:	Excellent
Media:	Acidic Gases/Hot Air
Abrasion Resistance:	Poor
Weathering:	Outstanding
Flexibility:	Fair

Insultex Style	Thickness	Tensile Strength	Temperature
Insultex 12/1406	.145" (120 oz/yd <sup>2</sup> )	1200 x 1200 Lbs/In	700 °F