




Flextech Engineering Inc.
www.flextechseals.com

Product Description

The Insultex 1400-FP is for applications from -80°F to 1000 °F. It is comprised of a layer of Teflex, with an “extreme cold” film protection which is bonded to a layer of nonwoven insulation mat. This unique bonding provides a strong and resilient material, which can reach very high temperatures.



Flextech Insultex 1400-FP Fluoroplastic and Fiberglass

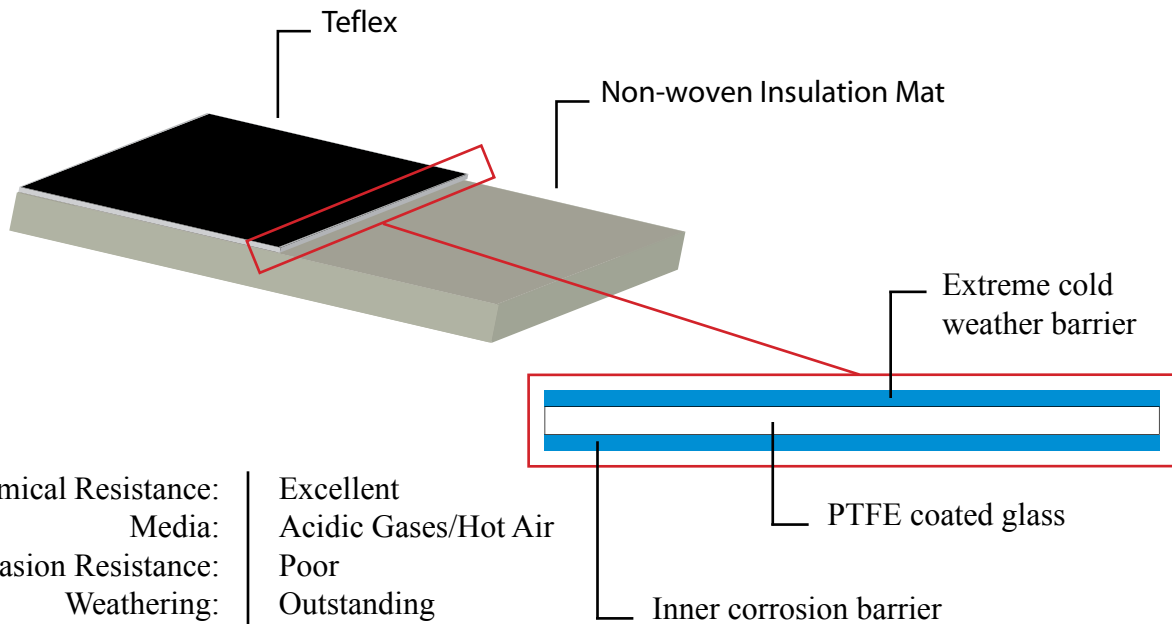

Chemical Resistance:	Excellent
Media:	Acidic Gases/Hot Air
Abrasion Resistance:	Poor
Weathering:	Outstanding
Flexibility:	Fair

Insultex Style	Thickness	Tensile Strength	Temperature
Insultex 1400-FP	.538” (126 oz/yd ²)	1200 x 1200 Lbs/In	-80 to 1000 °F