




Flextech Engineering Inc.
www.flextechseals.com

Product Description

The Insultex 50/71214 is for applications up to 1000 °F. It is comprised of a layer of Teflex which is bonded to a layer of nonwoven insulation mat. This unique bonding provides a strong and resilient material, which can reach very high temperatures.



Flextech Insultex 50/71214 Fluoroplastic and Fiberglass

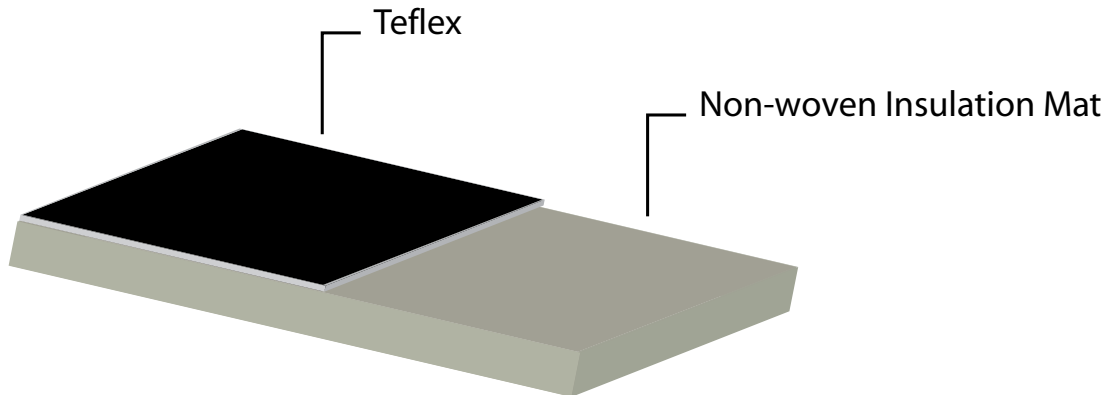

Chemical Resistance:	Excellent
Media:	Acidic Gases/Hot Air
Abrasion Resistance:	Poor
Weathering:	Outstanding
Flexibility:	Fair
Pressure Rating:	6 PSI max

Insultex Style	Thickness	Tensile Strength	Temperature
Insultex 50/71214	.582" (158 oz/yd ²)	1900 x 1900 Lbs/In	1000 °F