



Flextech Engineering Inc.  
www.flextechseals.com

### Product Description

Sleeving can be used to cover textile rope seals for improved sealability, or to insulate cables, wires, hoses, tubes and thermocouples. See material data sheets for the properties of the textiles.



## High Temperature Sleeving

Various materials

### Available Sizes

#### Nextel 312 Braided Sleeving (2200 °F)

Inside Diameter (In.):	1/16, 1/8, 1/4, 1/2, 3/4, 1, 1 1/2, 2, 2 1/2
Wall Thickness:	Varies with diameter

#### Silica Sleeving (1800 °F)

Inside Diameter (In.):	1/16, 1/8, 3/8, 1/4, 3/8, 1/2, 3/4, 5/8, 1, 1 1/2, 2, 2 1/2, 3, 3 1/2
Wall Thickness:	1/16", 1/8"

#### Fiberglass Sleeving (1000 °F)


Inside Diameter (In.):	1/16, 1/8, 3/8, 1/4, 3/8, 1/2, 3/4, 5/8, 1, 1 1/2, 2, 2 1/2, 3, 3 1/2
Wall Thickness:	1/16", 1/8"

#### Ceramic Sleeving (2000 °F)

Check with sales desk

#### Kevlar Sleeving

Check with sales desk

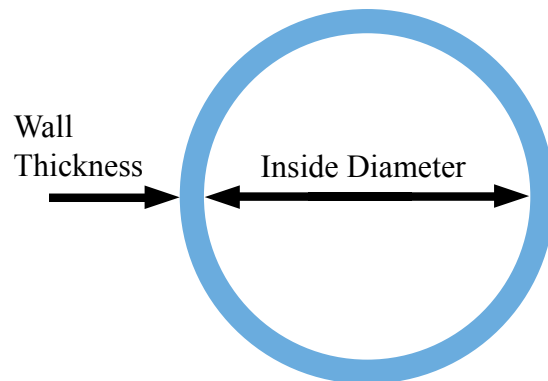

High temperature Sleeving is available in aramid, fiberglass, silica, and ceramic textiles, with either a Vermacite coating, Teflon, Silicone coating (in most cases).