





Flextech Engineering Inc.
www.flextechseals.com

Product Description

The Teflex series is 100% Fluoroplastic/glass with optional surface films that vary in thicknesses up to .060" thick. The LFP series are for corrosive or acidic applications. All Teflex styles are rated to 600 °F.

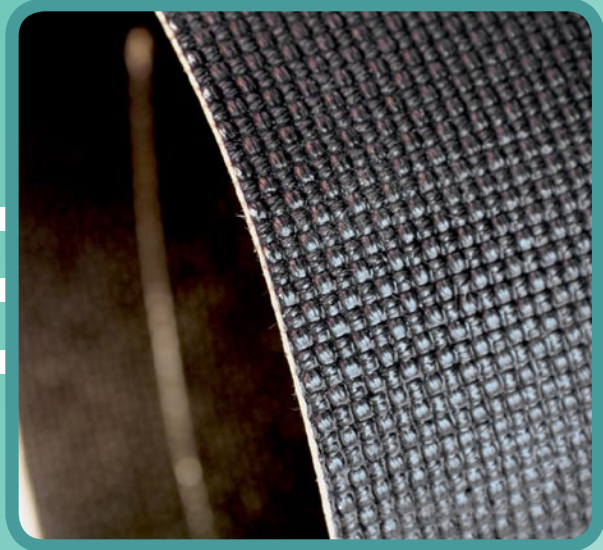

Flextech Teflex 14-20 LFP Fluoroplastic/glass

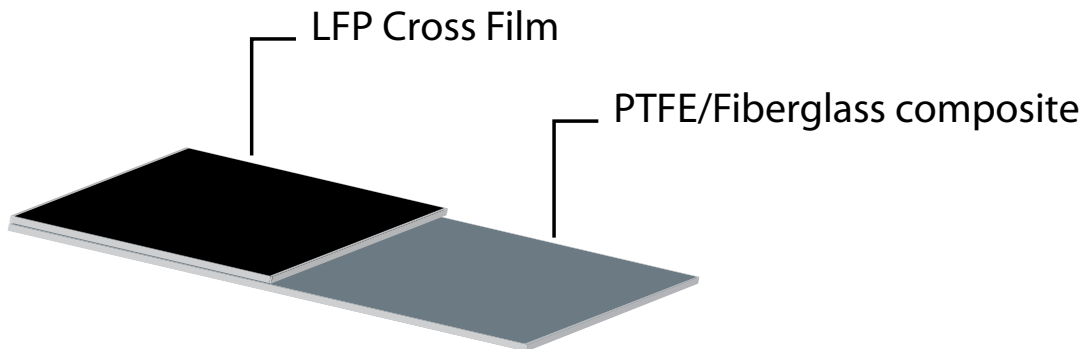

Temperature:	-70 °F to 600 °F
Media:	Acidic Gases/Hot Air
Abrasion Resistance:	Poor
Weathering:	Outstanding
Flexibility:	Fair

Teflex Style	Thickness	Tensile Strength	Film Thickness
Teflex 14-20 LFP	.060"/79 oz.	1200 x 1200 Lbs/In	20 mil